

CPA LARGE BEVEL FLOW PUMP



大斜流幫浦 CLS 系列 **SERIES II**

FEATURES

1. Dry motor type and resetting motor protection is built-in to prevent motor from over-heat and over-load.
2. Inner cable wires and cable base are upgraded by filling EPOXY to raise humidity-resistance.
3. Motor frame and outer cover are both made of stainless steel and water-cooling jacket is designed
4. Stainless steel shaft is calibrated by dynamic balance test. Dual mechanical seals SIC/SIC are installed and dual oil seal is designed to raise dust-proof.
5. Mix flow design to meet large flow capacity and purpose of energy saving and easy assemblage.
6. Pump housing bracket and stress eliminating plate are both made of high wear resistant steel.
7. The series can be particularly used for multi-function of water extraction and delivery.



CLS-1508


CLS-2008



CLS-2010

APPLICATIONS

Particular series for pumping station. Agriculture irrigation, drainage of fishing ponds, aquafarm, subway, flood control, water supply for Landscape and other particular applications for large-flow capacity.

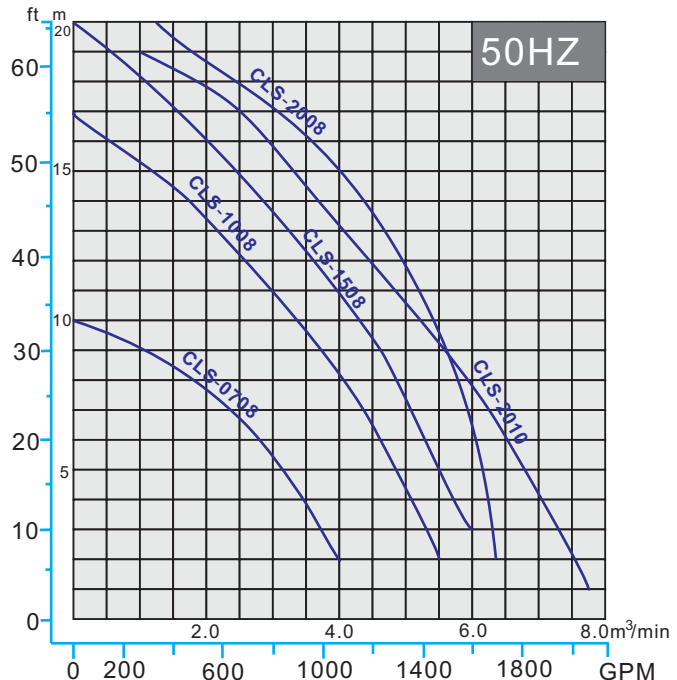

SPECIFICATIONS

型号 MODEL	马力 HP(kw)	出水口径 Outlet Inch	相数 Phase ∅	电压 Voltage V	極数 Polarity P	标准性能 Standard Performance		重量 Weight kg	直径 Diameter mm	高度 Height mm
						M	m³/min			
CLS-0708	7½(5.5)	8"	3∅	415V	4	6	2.8	110	330	720
CLS-1008	10(7.5)	8"	3∅	415V	4	9	3.5	140	380	800
CLS-1508	15(11)	8"	3∅	415V	4	10	4.0	170	420	800
* CLS-2008	20(15)	8"	3∅	415V	4	14	4.0	180	420	860
* CLS-2010	20(15)	10"	3∅	415V	4	10	5.0	185	420	860