

# HIGH HEAD WATER-COOLED DEWATERING PUMP



**WATERTEK**




**WA3-1004**



**WA3-1006**

## HIGH HEAD

### STRUCTURAL DRAWING

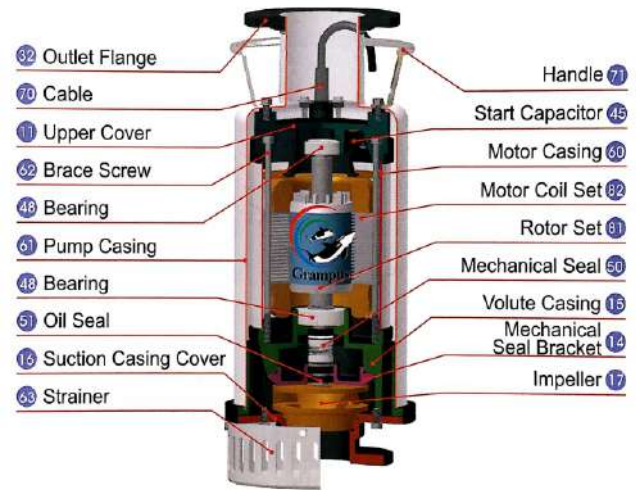

### PERFORMANCE CURVE

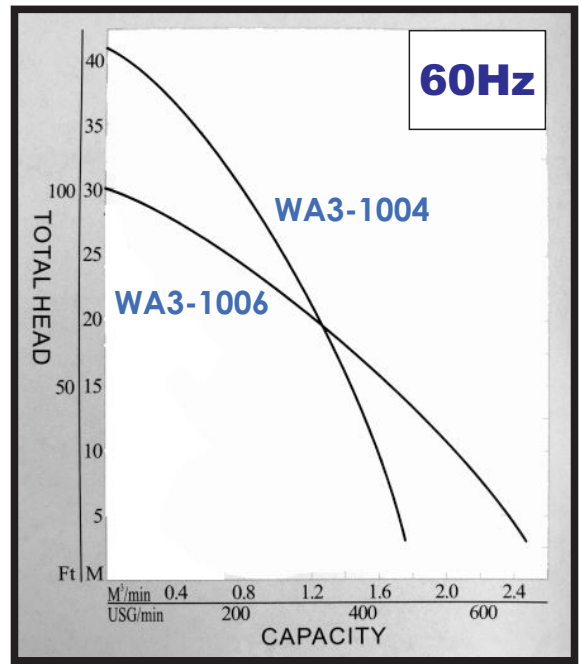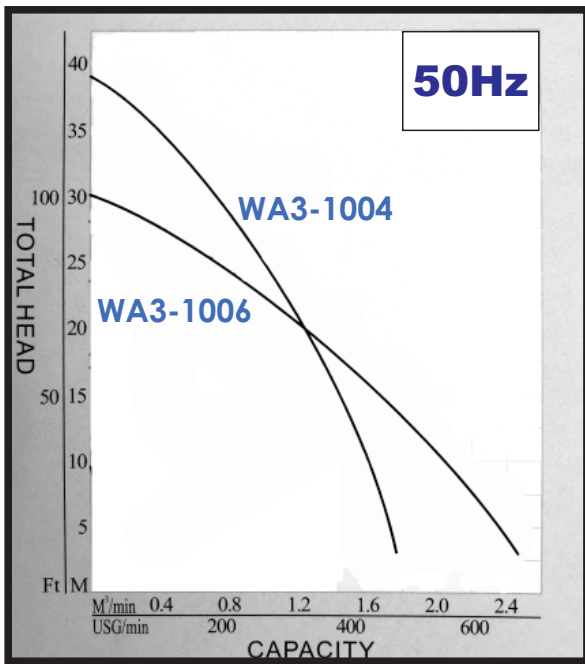

### APPLICATION

1. Install the strainer, generally use for water supplying and drainage in the fish pond.
2. After pulling down the pump's strainer, you can install the check valve through the inlet flange interface and connect the well piping. This can use for faming irrigation to pump the underground water.
3. Factory drainage waste water, water supply for mountainside, landscaping and gardening...etc. Use for long time circulation water supply.

### SPECIFICATION

Impeller	Model	Frequency	Phase	Power	Caliber	Rotation	Std.Head	Std.Flow	Max.Head	Max.Flow	Weight							
Impeller	Model	Hz	∅	Hp	KW	Inch	mm	P/rpm	M	M³/min	M	M³/min	Kg					
Channel Impeller	WA3-1004	50	60	3	10	7.5	4"	100	2P/2850/3450	25M	26M	1.00	1.00	39M	41M	1.80	1.80	72
	WA3-1006	50	60	3	10	7.5	6"	150	2P/2850/3450	17M	17M	1.50	1.50	30M	30M	2.60	2.60	72