


HIGH SPEED PADDLEWHEEL AERATOR



三淼牌高速水車

145RPM

WATERTEK

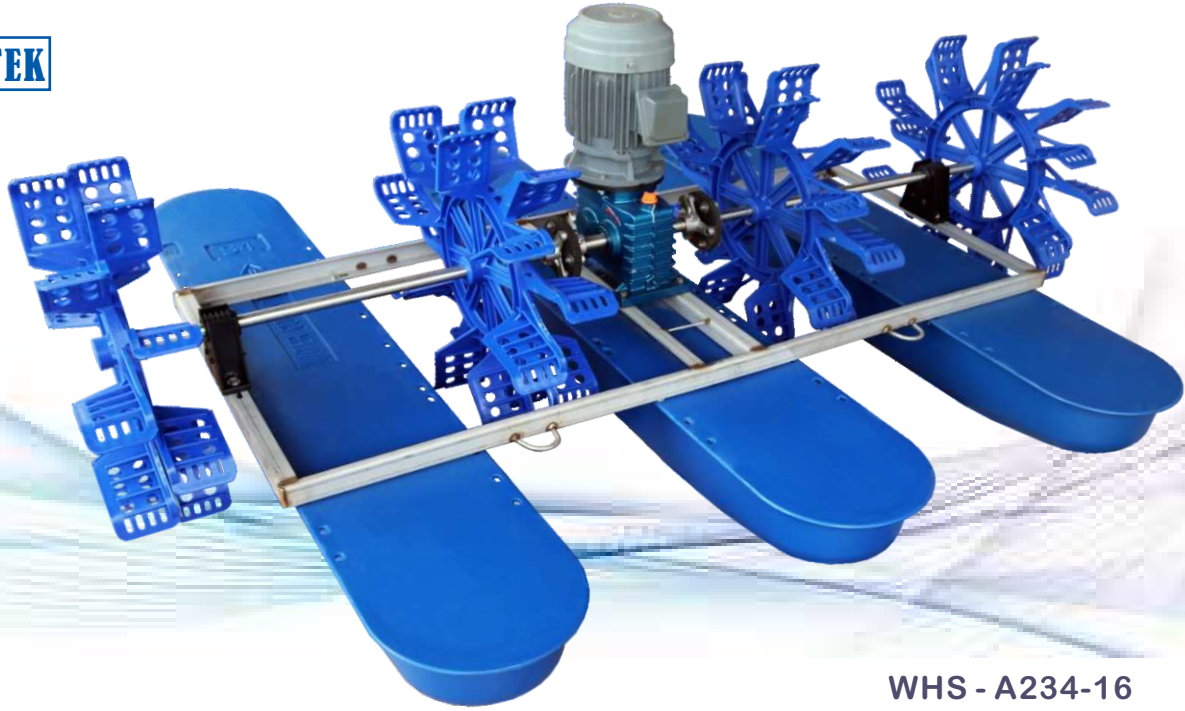

WHS - A234-16
(2HP, 3PHS, 380/415V, 50Hz, 4p, 2.6A)

- 1. CHARACTERISTICS :**
EFFECTIVE OXYGENATION, INCREASE THE SURVIVAL RATE OF THE CULTURED ANIMALS, BRAND NEW DESIGN OF SPARE PARTS, EASY ASSEMBLY AND LONGER SERVICE LIFE.
- 2. EFFICIENCY :**
STRONG WATER FLOW AND FASTER OXYGENATION.
- 3. OXYGENATION :**
HIGHER OXYGEN TRANSFER RATE AND AERATION EFFICIENCY.

SPECIFICATIONS :

Specification 規格表	型號	Model	WHS-A234-16
	馬力	Motor Hp	2 HP
	耗電量	Power Consumption	2.6A
	電壓	Voltage	380V/415V
	電相	Phase	3 Phase 50Hz
	葉輪數	Impeller Number	4 Pcs
	外形尺寸	Dimensions	175cm x 217cm x 89cm
Capability 性能	裝運體積	Storage Volume	0.7M ³
	動力效力	Std Oxygen Transfer Rate	2.90Kg.O ₂ /Hr
	增氧能力	Std Aeration Efficiency	1.86Kg.O ₂ /Kw.Hr

增氧機零件組織圖 SPARE PARTS OF PADDLEWHEEL AERATOR



HDPE LONG FLOATER
(1750m)



HIGH EFFICIENCY
INDUCTION MOTOR



HIGH SPEED BEVEL GEAR REDUCER
(d28mm x H110m)



N-TYPE SS COMMON BED
(L1675 x 725MM)



16-BLADE PLASTIC
IMPELLER NO.1816



ADJ SMALL ROLLER SUPPORTER
(d25.2mm x H110m)



ROUND STAINLESS STEEL
MOVABLE CONNECTOR
(d28.5 x 25.5mm)



HDPE
MACHINE COVER



SS SOLID DRIVE ROD


HIGH SPEED PADDLEWHEEL AERATOR



三淼牌高速水車

145RPM

WATERTEK

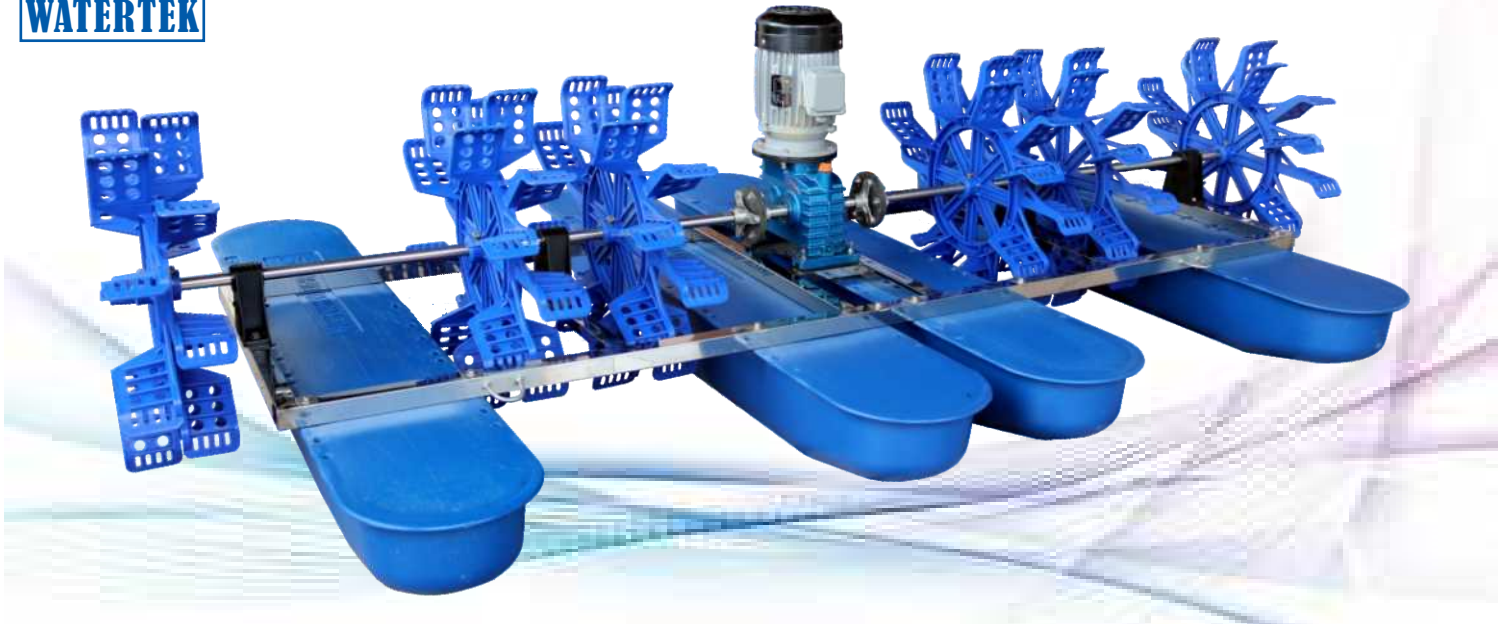

WHS - A346-16
(3HP, 3PHS, 380/415V, 50Hz, 4p, 3.9A)

- 1. CHARACTERISTICS :**
EFFECTIVE OXYGENATION, INCREASE THE SURVIVAL RATE OF THE CULTURED ANIMALS, BRAND NEW DESIGN OF SPARE PARTS, EASY ASSEMBLY AND LONGER SERVICE LIFE.
- 2. EFFICIENCY :**
STRONG WATER FLOW AND FASTER OXYGENATION.
- 3. OXYGENATION :**
HIGHER OXYGEN TRANSFER RATE AND AERATION EFFICIENCY.

SPECIFICATIONS :

規格表 Specification	型號	Model	WHS-A346-16
	馬力	Motor Hp	3 HP
	耗電量	Power Consumption	3.9A
	電壓	Voltage	380V/415V
	電相	Phase	3 Phase 50Hz
	葉輪數	Impeller Number	6 Pcs
	外形尺寸	Dimensions	164cm x 298cm x 89cm
性能 Capability	裝運體積	Storage Volume	1.1M ³
	動力效力	Std Oxygen Transfer Rate	4.42Kg.O ₂ /Hr
	增氧能力	Std Aeration Efficiency	1.86Kg.O ₂ /Kw.Hr

增氧機零件組織圖 SPARE PARTS OF PADDLEWHEEL AERATOR



HDPE LONG FLOATER
(1750m)



HIGH EFFICIENCY
INDUCTION MOTOR



HIGH SPEED BEVEL
GEAR REDUCER
(d28mm x H110m)



PLASTIC PLATE
(H10mm)



SS SQ PIPE COMMON BED
(L2500 x 725MM)



16-BLADE PLASTIC
IMPELLER NO.1816



ADJ SMALL ROLLER SUPPORTER
(d25.2mm x H120m)



ROUND STAINLESS STEEL
MOVABLE CONNECTOR
(d28.5 x 25.5mm)



HDPE
MACHINE COVER



SS SOLID DRIVE ROD
d 25 x 1270mm