


SUPER TURBINE AERATOR



大亞牌超級曝氣式增氧機 (標準型/STANDARD)

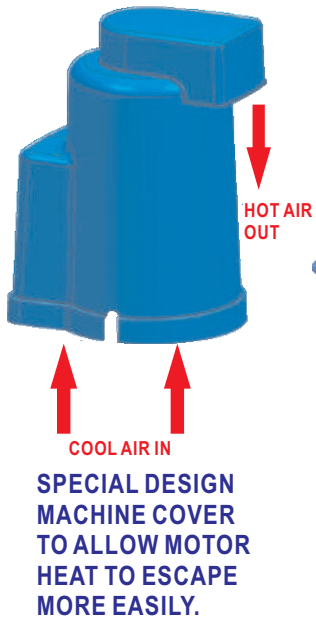

Ø 7.5" x d 1.8" (Ø190MM x H 45MM)



SUPER TURBINE DIFFUSER 特大曝氣盤
Ø 190MM x H45MM

7.5" 曝氣盤給氧效果比6" 曝氣盤增加一倍

CHARACTERISTICS 特性：

1. Billion of micro bubble are deep diffused continuously by the professional SUPER TURBINE for super high aeration.
2. Dissolved oxygen to a depth of more than 1.5M.
3. Turbine vertical depth of 75cm & 94cm are available and the turbine can be adjusted to suite your pond depth.
4. Featured with Ø7.5" turbine with higher aeration capacity as compared to the Ø6" turbine.
5. High Efficient motors Type T100-3 are adopted to give more aeration at lower power consumption.
6. Specially design machine cover to allow more heat from the motor to escape faster.
7. Combine this turbine aerator and paddlewheel aerator to the culture pond reach best aeration.
8. Good for use in inland ponds, hatchery, lake cage, bay cage and sea cage culture.
9. Higher oxygenation transfer rate and aeration efficiency.



SPECIFICATION :

380V/50HZ

| MODEL | MOTOR HP | PHASE | VOLT | HZ | TURBINE VERTICAL WATER DEPTH | OPERATION AMP | MOTOR FULL AMP | OXYGENATION TRANSFER RATE | AERATION EFFICIENCY |
|---------------|----------|-------|-------|----|------------------------------|---------------|----------------|---------------------------|-----------------------------|
| *AST-A250-75 | 2HP x 4P | 3Ø | 380 V | 50 | 75CM | 3.0A | 4.2A | 4.2Kg.O ₂ /Hr | 2.4kg.O ₂ /Kw.Hr |
| *AST-A300-100 | 3HP x 4P | 3Ø | 380 V | 50 | 100CM | 3.5A | 5.0A | 5.5Kg.O ₂ /Hr | 2.4kg.O ₂ /Kw.Hr |